

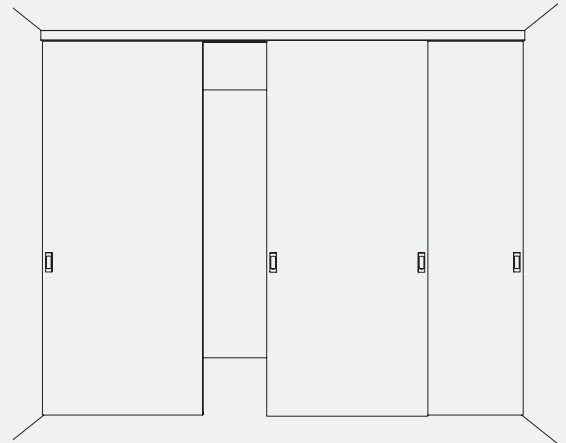
Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. With soft and self closing mechanism. Wall or ceiling mounting.

Product highlights


- Flexibility** Ceiling mounting with integrated clip-on panel in aluminum or wood
- Productivity** Multi-track guide and running tracks reduce installation cost

Technical specifications

- Max. 100 kg (220 lbs.)
- Max. 2400 mm (7' 10 7/16")
- Max. 1200 mm (3' 11 1/4")
- 28–30 mm (1 3/32" to 1 3/16")



Installation examples

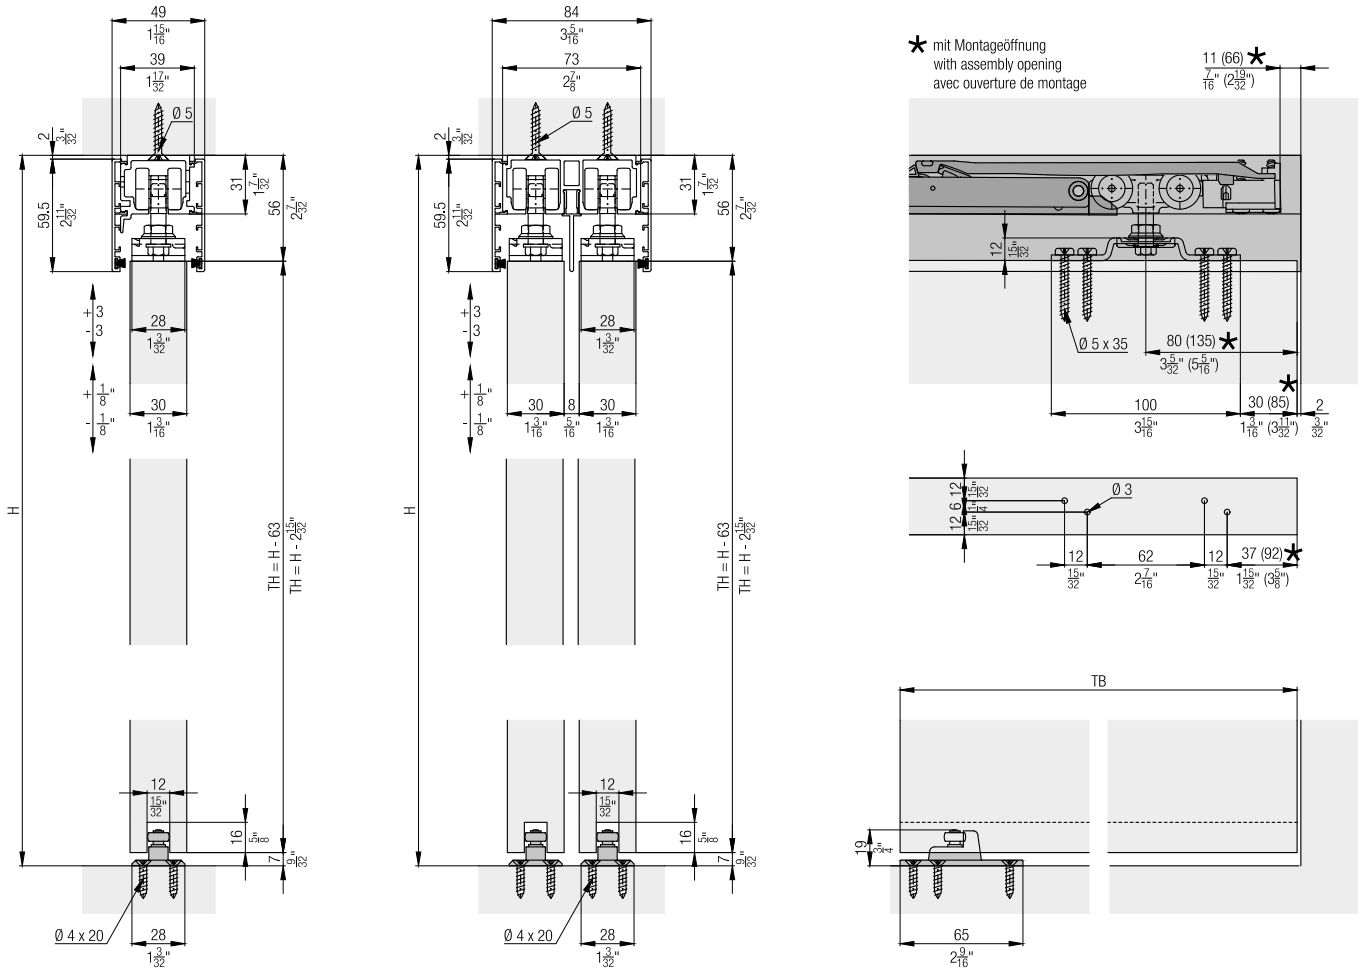









Set for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071

	057.3139.071	No.
--	--------------	-----




Set consisting of:

	Running gear, ball bearing, rollers plastic white	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2	057.3073.072
	Suspension bolt, M8x32 mm (5/16"x1 1/4"), steel, zinc-plated	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	057.3129.101
	Pan head screw, 5x35 mm (3/16"x1 3/8"), steel, zinc-plated	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	057.3120.071
	Countersunk head screw, 4x20 mm (5/32"x25/32"), steel, zinc-plated	4	766.5042.120


Running tracks

		mm (inch)	No.
	Combi running track, aluminum, pre-drilled	2,000 (6' 6 3/4 ")	057.3048.200
		2,500 (8' 2 7/16")	057.3048.250
		3,500 (11' 5 25/32")	057.3048.350
		6,000 (19' 8 7/32")	057.3048.600
		cut to size	057.3048.990
	Spacer track, for wall mounting, plastic, gray	2,000 (6' 6 3/4 ")	057.3054.200
		cut to size	057.3054.990
	Double running track, aluminum, anodized, pre-drilled	2,500 (8' 2 7/16")	042.3002.250
		3,500 (11' 5 25/32")	042.3002.350
		6,000 (19' 8 7/32")	042.3002.600
		cut to size	042.3002.990
	Triple running track, aluminum, anodized, pre-drilled	6,000 (19' 8 7/32")	042.3084.600
		cut to size	042.3084.990
	Disposable cover to running track Hawa Divido 100 / Hawa Porta 45/60/100, plastic, black	2,000 (6' 6 3/4 ")	057.3098.001
		cut to size	057.3098.990

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2,500 (8' 2 7/16")	042.3004.250
		3,500 (11' 5 25/32")	042.3004.350
		6,000 (19' 8 7/32")	042.3004.600
		cut to size	042.3004.990
	Intermediate panel for 042.3002./042.3084., aluminum, anodized	6,000 (19' 8 7/32")	042.3003.600
		cut to size	042.3003.990
	Brush seal, gray, in rolls	10,000 (32' 9 11/16")	053.3040.100





Clip-on components

		No.
	Clip component for wooden and aluminum panel, every 500 mm (1' 7 11/16"), aluminium, pre-drilled	057.3117.001

Soft close



For soft closing in opening and closing direction
order 2 sets.

		No.
Soft close Hawa Porta 100, Divido 100, 61–100 kg (133 to 220 lbs.), 1 piece		042.3102.071
Soft close Hawa Porta 60/100, Divido 100, 10–60 kg (22 to 132 lbs.), 1 piece		042.3102.072

		042.3102.071	042.3102.072	No.
Set consisting of:				
	Soft close, top running, 61–100 kg (133 to 220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22 to 132 lbs.), plastic		1	042.3106.072




Cover for assembly opening

		No.
Cover cap to assembly opening, 1-piece set		042.3114.071

		042.3114.071	No.
Set consisting of:			
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566




Panel end component set, 49 mm (1 15/16"), aluminum, ceiling mounting

		No.
Panel end component set for 057.3048., 49x60 mm (1 15/16x2 3/8"), aluminum, anodized, for ceiling mounting		042.3028.071


		042.3028.071	No.
Set consisting of:			
	Panel end component, 49 mm (1 15/16"), aluminum, anodized	1	042.3028.901
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171

Panel end component set, 51 mm (2"), aluminum, wall mounting


		No.
Panel end component set for 057.3048., 51x60 mm (2"x2 3/8"), aluminum, anodized, for wall mounting		042.3028.075

		042.3028.075	No.
Set consisting of:			
	Panel end component, 51 mm (2"), aluminum, anodized	1	042.3028.905
	Bracker connector, steel, zinc-plated	2	057.3051.101
	Screw, M4x2.6 mm (5/32"x 1/8"), steel, zinc-plated	4	011.0101.171




Wall compensation profiles

		mm (inch)	No.
	Wall compensation profile, with sealing profile gray, aluminum, anodized	2,500 (8' 2 7/16")	042.3064.071
		3,000 (9' 10 1/8")	042.3064.072


Bottom guide set for wall mounting

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171


Accessories

		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic, blue	057.3099.071

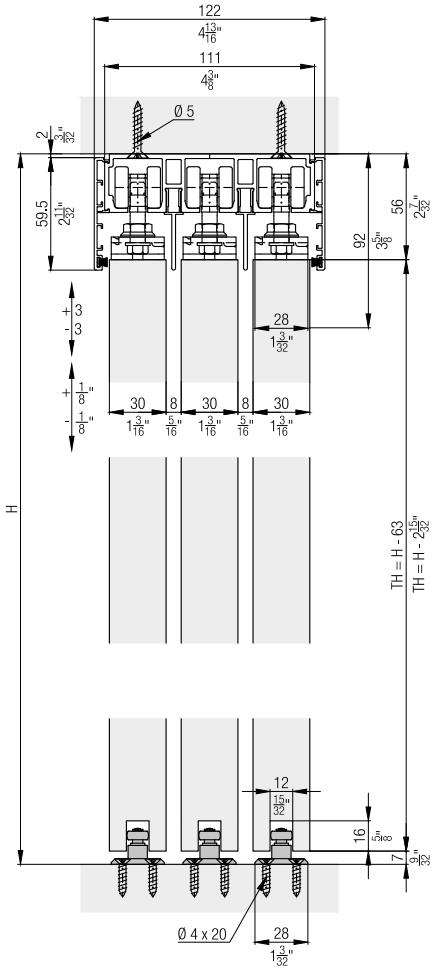
Further installation examples




Wall mounting

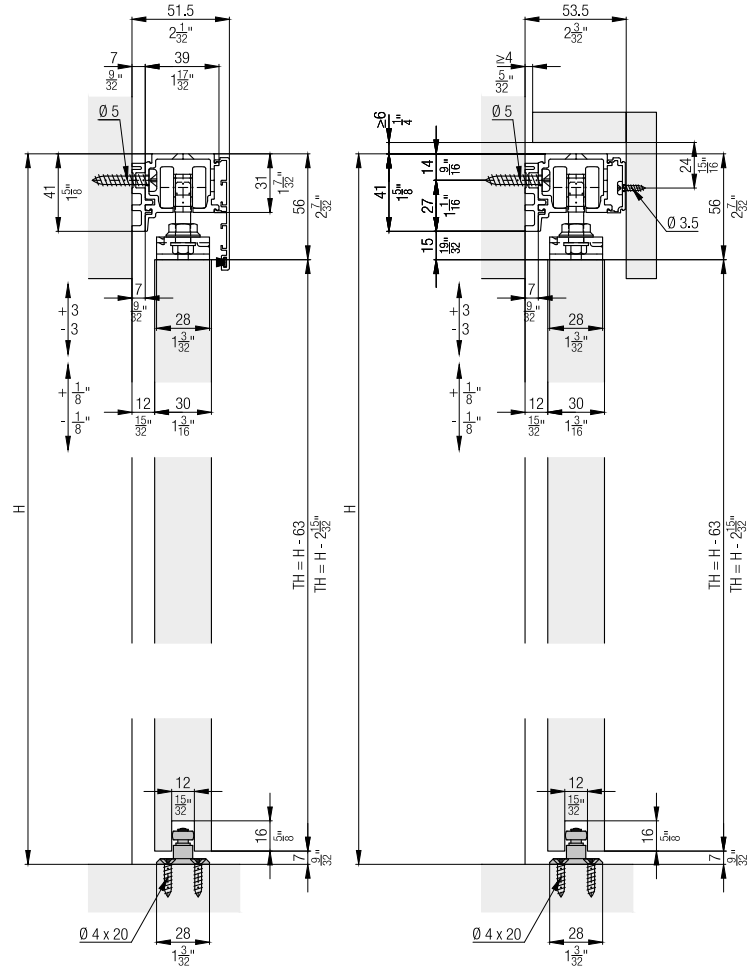


Calculations

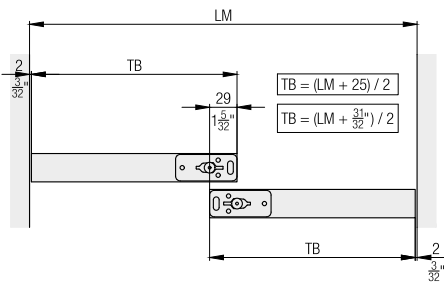


Wall bracket bottom guide

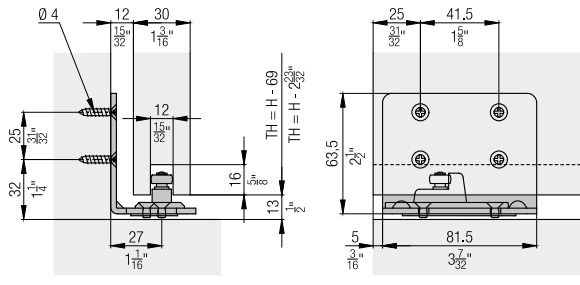

Calculations of clip-on panels

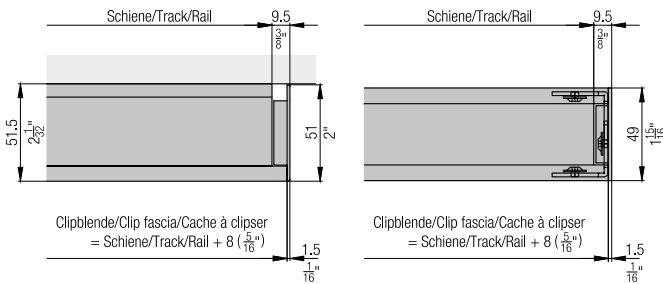

Wall compensation profile



Soft close

Beidseitig gedämpfte Ausführungen ohne stirnseitigen Zugang erfordern zwei Montageöffnungen. Versions with soft closing mechanism at both sides without access from the leading edge require two assembly openings. Les versions avec amortissement bilatéral sans accès frontal exigent deux ouvertures de montage.

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Dimensions: ≥ 320 , $\geq 1' - 19\frac{1}{32}"$, $Z \geq 535$, $Z \geq 1' - 9\frac{1}{16}"$

Montageöffnung assembly opening ouverture de montage

Dimensions: ≥ 62 , $\geq 2\frac{7}{16}"$, ≥ 320 , $\geq 1' - 19\frac{1}{32}"$, $Z \geq 480$, $Z \geq 1' - 6\frac{29}{32}"$

*	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/H/C	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 60/100 HM/HMD/HMT	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 G/GU/GM	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Porta 100 GW/GWF	1' 8 ⁵ / ₃₂ "	1' 9 ¹¹ / ₃₂ "	1' 11 ¹ / ₄ "	2' 6"	2' 6 ²⁹ / ₃₂ "	2' 7 ³ / ₁₆ "
Hawa Porta 100 GMD	1' 7 ⁷ / ₃₂ "	1' 9 ⁷ / ₃₂ "	1' 11 ¹ / ₄ "	2' 5 ¹ / ₁₆ "	2' 7 ¹ / ₁₆ "	2' 7 ³ / ₁₆ "
Hawa Divido 100 H/HM/GR	1' 6 ²⁹ / ₃₂ "	1' 9 ¹ / ₁₆ "	1' 11 ¹ / ₄ "	2' 4 ³ / ₄ "	2' 6 ²⁹ / ₃₂ "	2' 9 ³ / ₃₂ "
Hawa Divido 100 GRM	1' 8 ⁵ / ₃₂ "	1' 10 ¹¹ / ₃₂ "	1' 0 ¹ / ₂ "	2' 6"	2' 8 ⁵ / ₃₂ "	2' 10 ¹¹ / ₃₂ "

Dimensions: ≥ 62 , $\geq 2\frac{7}{16}"$, ≥ 570 , $\geq 1' - 10\frac{7}{16}"$, $Z \geq 840$, $Z \geq 2' - 9\frac{1}{16}"$

Montageöffnung assembly opening ouverture de montage

Accessories

- Hawa 4-point guidance from page 490
- Hawa stacking system from page 492
- Hawa Divido overview from page 503

Planning/execution

Further information about the product can be found on www.hawa.com.