



MultiSwitch MagicSwitch

Product advantages

- ▶ Invisible switch for range of applications
- ▶ Connection of 1 to 4 identical sensors to 1 master unit

Features

- ▶ Mounted on the back of the panel or incorporated into a 35 mm blind hole, the MagicSwitch detects the contact of the surface on the front of the panel and switches
- ▶ The MagicSwitch only works in conjunction with non-metallic surfaces and materials such as wood, glass and ceramics up to a material thickness of 19 mm

Application

- ▶ Switching ballasts and furniture lights
- ▶ As on/off switch as well as toggle switch
- ▶ Switching and dimming at 12/24 Volt DC
- ▶ Switching at 230 Volt AC and Vario

Order information

- ▶ Master unit is always required

MultiSwitch MagicSwitch

Magic Sensor	30 161 01
--------------	-----------

Accessories

Master unit 12 Volt DC – 36 W	30 142 01
Master unit 12 Volt DC – 60 W incl. ballast	30 146 01
Master unit 230 Volt AC – 500 W with Euro flat plug	30 141 01
Master unit 24 Volt DC – 120 W	30 143 01
Master unit Vario 12 Volt DC – 36 W	30 144 01
Repeater 12 Volt DC – 36 W	30 263 07
Extension lead sensor cable 3000 mm	36 830 01

Technical details




For use with: LED lights
 Max. switching power: 12 Volt DC-36 W
 24 Volt DC-120 W
 230 Volt AC-500 W

Test marks and symbols: CE
 Master unit supply lead: HV 3000 mm
 LV 2000 mm

Switching lead: HV 150 mm
 LV 300 mm

Standby: <0.5 W - Master unit including sensors

Assembly drawing

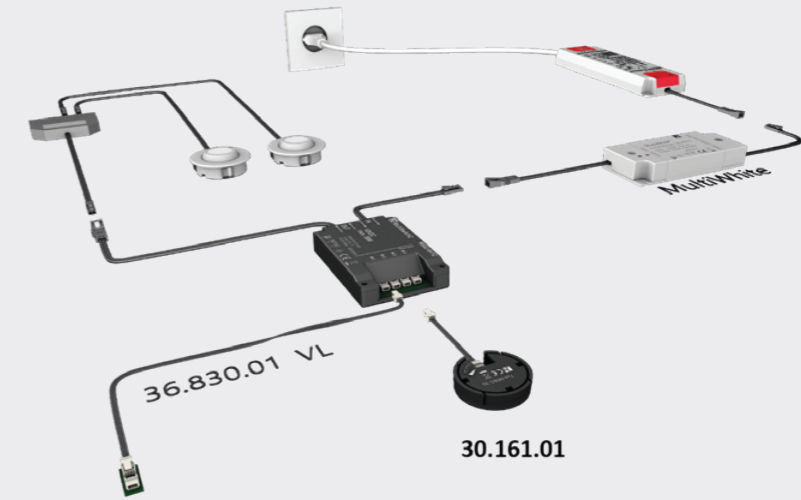

Max. 4x 30.161.01

